


## QUICK REFERENCE GUIDE

- Solid Roller ➤ 300 Series Stainless Steel ➤ High Corrosion Resistance
- Recommended for -40°F to 800°F ➤ Attachments Available

HKK Double-Pitch, Stainless Steel chain combine the same corrosion resistance and high temperature range as our single-pitch stainless chain, while maintaining lower cost and weight. All component parts of HKK stainless steel chains are made of 300 series stainless steel.

HKK Stainless Steel Double-Pitch chains are assembled with solid rollers. This unique solid roller will not split or deform like conventional split rollers. Solid rollers will retain their original cylindrical shape under severe loads and adverse temperatures.


Transmission type chains with figure-eight side plates are available. HKK Double-Pitch Stainless Steel chain sizes C2060H and up are manufactured with heavy side plates. Carrier rollers and attachments are also available. 600 series stainless steel is available upon request.

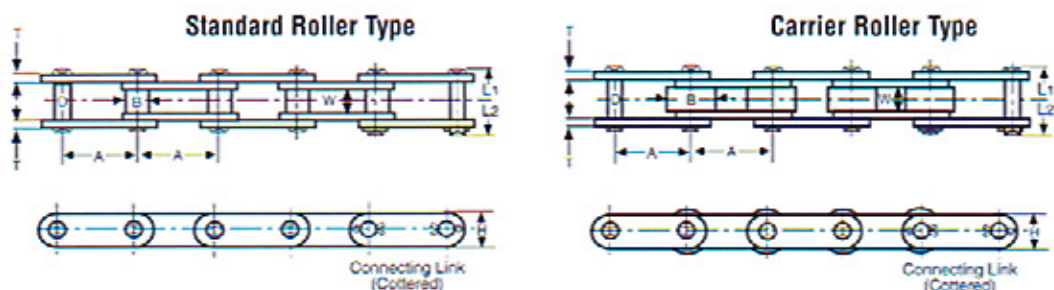

### Conveyor Type

HKK Stainless Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		Dia. B	Width W		Height H	Thickness T	L1	L2			
<b>STANDARD ROLLER TYPE</b>											
HKK C 2040-SS	1	0.312	5/16	0.156	0.450	0.060	0.323	0.378	99	2,800	0.32
HKK C 2050-SS	1-1/4	0.400	3/8	0.200	0.591	0.080	0.400	0.467	154	4,450	0.55
HKK C 2060H-SS	1-1/2	0.469	1/2	0.234	0.670	0.125	0.565	0.657	231	6,200	0.93
HKK C 2080H-SS	2	0.625	5/8	0.312	0.890	0.156	0.699	0.829	396	10,670	1.56
HKK C 2100H-SS	2-1/2	0.750	3/4	0.375	1.126	0.187	0.831	0.969	583	12,900	2.33
<b>CARRIER ROLLER TYPE</b>											
HKK C 2042-SS	1	0.625	5/16	0.156	0.450	0.060	0.323	0.378	99	2,800	0.55
HKK C 2052-SS	1-1/4	0.750	3/8	0.200	0.591	0.080	0.400	0.467	154	4,450	0.85
HKK C 2062H-SS	1-1/2	0.875	1/2	0.234	0.670	0.125	0.565	0.657	231	6,200	1.40
HKK C 2082H-SS	2	1.125	5/8	0.312	0.890	0.156	0.699	0.829	420	10,670	2.26
HKK C 2102H-SS	2-1/2	1.562	3/4	0.375	1.126	0.187	0.831	0.969	583	12,900	3.80

Dimensions in inches & pounds

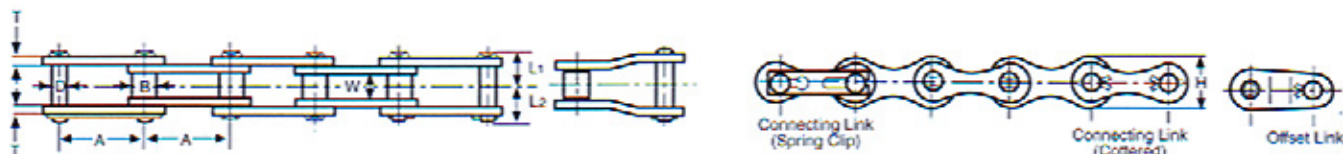

### Transmission Type

HKK Stainless Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Maximum Allowable Load	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		Dia. B	Width W		Height H	Thickness T	L1	L2			
HKK A 2040-SS	1	0.312	5/16	0.156	0.450	0.060	0.323	0.378	99	2800	0.29
HKK A 2050-SS	1-1/4	0.400	3/8	0.200	0.591	0.080	0.400	0.467	154	4450	0.49
HKK A 2060-SS	1-1/2	0.469	1/2	0.234	0.670	0.094	0.500	0.583	231	6200	0.69
HKK A 2080-SS	2	0.625	5/8	0.312	0.890	0.125	0.628	0.750	396	10,670	1.15

Dimensions in inches & pounds