



Side Bow Chain

QUICK REFERENCE GUIDE

- Solid Roller ➤ Solid Bushing ➤ Operates On Standard Sprockets
- Cotter Connecting Links

HKK Side Bow roller chain consists of standard solid roller / solid bushing roller links. Specially designed pin links allow increased clearance between pins and bushings and between the roller link and pin link plates. This feature gives the chain freedom to slightly twist or curve on a horizontal plane.

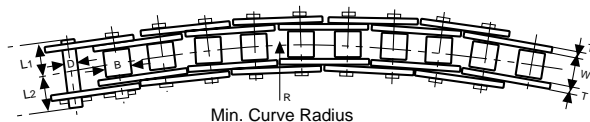

HKK Side Bow Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Min. Curve Radius	Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs)
		Dia. B	Width W		Height H	Thickness T	L1	L2				Riveted
HKK 40-SB	1/2	0.312	.312	0.141	0.457	0.060	0.335	0.401	13.780	400	3,510	0.41
HKK 50-SB	5/8	0.400	.375	0.175	0.571	0.080	0.407	0.483	15.748	700	5,460	0.68
HKK 60-SB	3/4	0.469	0.500	0.200	0.689	0.094	0.512	0.583	19.685	950	7,300	0.94
HKK 80-SB	1	0.625	0.625	0.281	0.921	0.125	0.654	0.736	23.622	1,700	14,000	1.66