


Straight Sidebar Chain

**QUICK
REFERENCE
GUIDE**

- Built To Same Specifications As Standard ANSI Except Straight Plates
- Solid Rollers ➤ Solid Bushings ➤ Hi Grade Alloy Steel
- All Shot Peened Parts ➤ Superior Capacity Plus
- Runs On Standard Sprocket

HKK “C” type straight side-bar (conveyor type) chain is built to the same specifications as our standard ANSI Superior Capacity Plus chain. Dimensionally the same as ANSI series chain except with straight side plates, these chains are ideally suited for conveying product and/or sliding on a surface. C type chain can be used with standard ANSI series sprockets.

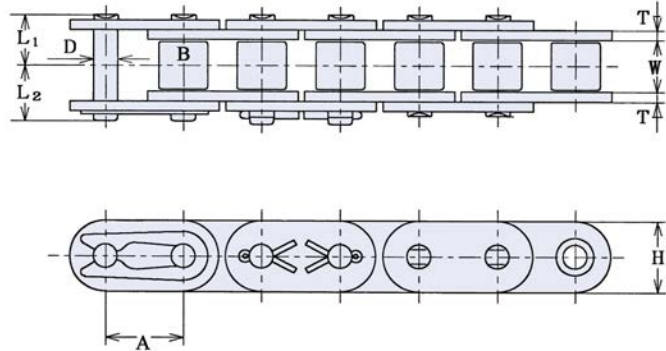

HKK Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs)
		Dia. B	Width W		Height H	Thickness T	L1	L2			
HKK C35	3/8	.200	3/16	.141	.354	.050	.236	.272	500	2420	.26
HKK C40	1/2	.312	5/16	.156	.461	.060	.327	.370	935	4290	.45
HKK C50	5/8	.400	3/8	.200	.575	.080	.402	.461	1620	7160	.74
HKK C60	3/4	.469	1/2	.234	.689	.094	.504	.555	2400	9670	1.10
HKK C80	1	.625	5/8	.312	.921	.125	.646	.732	4125	17,620	1.89
HKK C100	1-1/4	.750	3/4	.375	1.154	.156	.776	.917	6350	26,480	2.94
HKK C120	1-1/2	.875	1	.437	1.382	.187	.976	1.126	8525	37,475	4.34
HKK C140	1-3/4	1.000	1	.500	1.610	.219	1.063	1.232	11,290	48,470	5.58
HKK C160	2	1.125	1-1/4	.562	1.839	.250	1.268	1.437	14,875	61,710	7.37
HKK C200	2-1/2	1.562	1-1/2	.781	2.354	.312	1.547	1.878	18,470	101,210	12.75
HKK C240	3	1.875	1-7/8	.936	2.768	.375	1.685	2.200	25,310	151,920	17.79